


XD20-SERIES SOFT WALL SELF FLOATING DREDGE HOSE

ABRASOR®

Abrasor® XD30 Series Soft Wall Self Floating Dredge Hoses are designed to replace traditional hose floats and pontoons in dredging operations. Our floating hose is constructed with closed cell foam and double carcass technology, preventing damage and water ingress into the hoses foam layer. Incorporating our proprietary Abrasatech® tube liner, these hoses provide industry-leading performance in abrasion loss.

Rated for discharge duty only, Abrasor® soft wall self floating hose prevents permanent kinking, making them ideal for applications where the hoses will be over flexed. Our extensive range of stocked liners allows our dredge hose to be made suitable for dredging slurries containing, chemicals, acids and hydrocarbons.

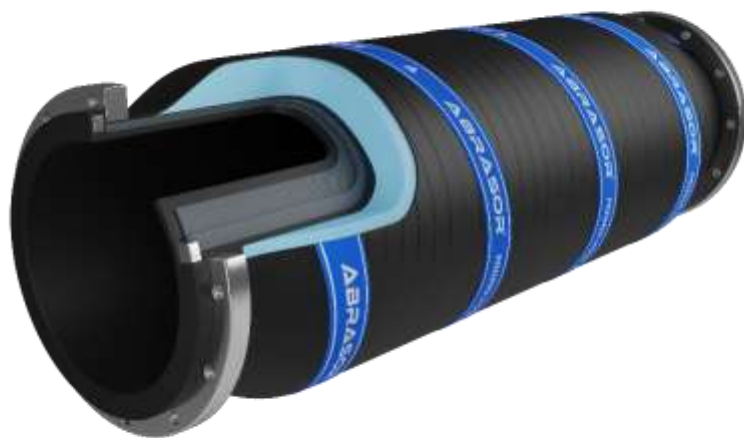

TECHNICAL SPECIFICATIONS

Hose size	DN25 - 1200
Length	Up to 20m
Pressure rating	-100kPa - +8000kPa
End connections	Swivel flange (beaded) Flanged spigot (swivel or fixed) Custom
Flange patterns	AS2129, ASME B16.5, ASME B16.47, AWWA C207, AS4087, BS EN 1092, BS 3293, JIS B2220, SANS 1123, DIN ISO 7005, custom
Safety factor	4:1
Temperature rating	-30 to +80 (ABRASATECH)
Optional extras	Anti-static wire Wear monitor ID tagging

MATERIAL SPECIFICATIONS

Inner Liner	ABRASATECH (for high wear slurry) QUARRYTECH (for fine sands slurry) ROCKTECH (for large rock slurry) NITRILE (for high temp abrasive slurry or slurry containing hydrocarbons) BUTATECH (for high acidic slurry) HYPATECH (for high acidic or high temp media)
Reinforcement	Spiralled synthetic fabric
Outer cover	ABRASATECH (for abrasion and UV resistance) NEOTECH FRAS (for FRAS or oily environments) FLOWTECH (for extreme UV or seawater)
Connection material	Hot dipped gal (as standard) Stainless steel (SS316, SS304) Carbon steel Painted Custom

TECHNICAL PROPERTIES

HOSE SIZE		STANDARD LINER THICKNESS	MAX LINER THICKNESS	VACUUM RATING	STANDARD WORKING PRESSURE		MAX WORKING PRESSURE		SAFETY FACTOR	MINIMUM BEND RADIUS
DN	mm	mm	mm	%	kPa	PSI	kPa	PSI	Ratio	X Dia
50	50.8	6	6	100	700	100	8000	1160	4:1	Contact us
80	76.2	6	9	100	700	100	8000	1160	4:1	Contact us
100	101.6	6	12	100	700	100	8000	1160	4:1	Contact us
125	127	6	12	100	700	100	8000	1160	4:1	Contact us
150	152.4	6	12	100	700	100	8000	1160	4:1	Contact us
200	203.2	6	12	100	700	100	8000	1160	4:1	Contact us
250	254	9	15	100	700	100	8000	1160	4:1	Contact us
300	304.8	9	19	100	700	100	6000	870	4:1	Contact us
350	355.6	9	19	100	700	100	6000	870	4:1	Contact us
400	406.4	12	19	100	700	100	5000	725	4:1	Contact us
450	457.2	12	19	100	700	100	4000	580	4:1	Contact us
500	508	12	19	100	700	100	4000	580	4:1	Contact us
550	558.8	12	19	100	700	100	4000	580	4:1	Contact us
600	610	12	19	100	700	100	4000	580	4:1	Contact us
650	660.4	15	19	100	700	100	2500	363	4:1	Contact us
700	711.2	15	19	100	700	100	2500	363	4:1	Contact us
750	762	15	19	100	700	100	2500	363	4:1	Contact us
800	812.8	15	25	100	700	100	2500	363	4:1	Contact us
900	914.4	15	25	100	700	100	2500	363	4:1	Contact us
1000	1016	19	30	100	700	100	2500	363	4:1	Contact us
1100	1117.2	19	30	100	700	100	2500	363	4:1	Contact us
1200	1219.2	19	32	100	700	100	2500	363	4:1	Contact us

Key notes

1. Hoses can be fully customised to non-standard specifications including, inside diameter, outside diameter, liner thickness, working pressure, bend radius and weight
2. Max liner thickness and working pressure will not be compatible with all end configurations, please get in contact with us to find out more
3. For more info on buoyancy rating please get in contact with us